

# NATURE RIGID CORE SPC FLOORING

Transform Your Space with Nature's Touch

COLLECTION 2026

*Artisan*

# WHAT IS RIGID CORE SPC FLOORING

## PRECUILIARITY

Our SPC vinyl click flooring is 100% waterproof and with the high resistance to scratch surface treatment named "Diamond Core".

SPC stands for Stone Polymer Composite, it is water proof and suitable with underfloor heating systems.

It offers a real wood look and it's quiet and make people feel more comfort when under foot.

SPC connected by an extremely stable click system, then to make install work quicker and easier to DIY'er.

All materials are ECO friendly without any heavy metal, it's safe to kids and pets.



# CONTENTS



TP-1002

– HORIZON	08
– HERRINGBONE	32
– CHEVRON	38
– STONE	48
– OEM	58
– TECHNICAL	62



# NATURE RIGID CORE SPC FLOORING

# HORIZON



## HORIZON

Nature series combine all range of size and specification of Classic Wood, Herringbone SPC, Chevron SPC, Classic Stone flooring.

URBAN .....	12
GRAVEN .....	14
ROYAL .....	18

# STRATO HORIZON

VINYL FLOORING EXPERT

Nature series combine all range of size and specification of Classic Wood in different size.

Nature collection combines classic specifications and popular pattern, as well as innovative installation and styling, so that you can select your customized proprietary product portfolio.

## FEATURES BENEFITS



Total  
Thickness



Valinge Click



Anti Slip-R9



Pet-Free



Wear Layer



Underlayment for  
acoustic isolation



Bevelled Edge



Suitable for  
babies



POPULAR COLORS

RIGID CORE SPC FLOORING

URBAN

NATURE  
BY STRATO

COFFEE  
ESPRESSO  
MACCHIATO  
APPUCGINO  
LATTE  
MATCHA  
HAND-POURED  
TEA

## PARAMETERS



Subway



Valinge Click

### Wear layer

0.3mm

### Lock system

Valinge 2G-2G

### Overall thickness

5mm (4+1.0mm)XPE

### Size

180 × 1230mm

TP-1009

## URBAN AVAILABLE DECORS

RIGID CORE FLOORING



TP-1007



TP-1007



TP-1002



TP-1005



TP-1009



TP-1001

## URBAN AVAILABLE DECORS

RIGID CORE FLOORING



TP-1006



TP-1006



TP-1004



TP-1008



TP-1003



TP-1010

GRAVEN

NATURE  
BY STRATO

## PARAMETERS



Subway



Valinge Click



EIR

### Wear layer

0.5mm

### Lock system

Valinge 2G-2G

### Overall thickness

6.5mm (5+1.5mm|XPE)

### Size

228 × 1524mm

### Embossing

EIR Embossing

TD-2101

## GRAVEN AVAILABLE DECORS

RIGID CORE FLOORING



TD-2102



TD-2102



TD-2107



TD-2105



TD-2104



TD-2106

**NATURE**  
BY STRATO

## GRAVEN AVAILABLE DECORS

RIGID CORE FLOORING



TD-2106



TD-2101



TD-2108



TD-2103

ROAL



TC-3213



TC-3214

NATURE  
BY STRATO

228 x 1840 mm  
9" x 72,4"

READY STOCK

### PARAMETERS



Anti Slip-R9



Total Thickness  
(mm)



Pet-Free



Valinge 2G-5Gi



Waterproof



Bevelled Edge



Wear Layer



Underlayment for  
acoustic isolation



Coordinated  
Steps



Skirtings &  
Profiles

1840mm

228mm

## ROAL AVAILABLE DECORS

RIGID CORE FLOORING



TC-3206



TC-3206



TC-3202



TC-3203



TC-3204

## ROAL AVAILABLE DECORS

RIGID CORE FLOORING



TC-3211



TC-3211



TC-3210



TC-3209



TC-3212

## ROAL AVAILABLE DECORS

RIGID CORE FLOORING



TC-3205



TC-3205



TC-3201



TC-3207



TC-3208

**NATURE RIGID CORE**  
SPC FLOORING

**HERRINGBONE**



**HERRINGBONE**

Herringbone SPC can be install easily click together  
in an A and B format Valinge click system.

# STRATO HERRINGBONE

VINYL FLOORING EXPERT

Herringbone SPC can be install easily click together in an A and B format Valinge click system, so they can laid in the popular herringbone style, It can be easily installed even without a professional installer.

A variety of sizes and lengths of herringbone SPC are available to make the installation effect present a variety of rich visual aesthetics. The 90-degree assembly effect infinite extension expands your visual space.

## FEATURES BENEFITS



Overall Thickness



Valinge Click



Anti Slip-R9



Waterproof



Wear Layer



Suitable for babies



Bevelled Edge



Underlayment for acoustic isolation



### POPULAR COLORS

RIGID CORE SPC FLOORING

HERRINGBONE

NATURE  
BY STRATO

## PARAMETERS

<b>Wear layer</b>	<b>Lock system</b>	<b>Overall thickness</b>	<b>Size</b>
0.3mm	Valinge 2G-5Gi	5mm (4.0+1.0mmIXPE)	125×625mm

<b>Wear layer</b>	<b>Lock system</b>	<b>Overall thickness</b>	<b>Size</b>
0.5mm	Valinge 2G-5Gi	7.5mm (6.0+1.5mmIXPE)	127×635mm

## HERRINGBONE AVAILABLE DECORS

RIGID CORE FLOORING



TR-4301



TR-4302



TR-4303

TR-4301

# NATURE RIGID CORE SPC FLOORING

# CHEVRON



## CHEVRON

Strato... Chevron SPC is the future star of the Bright series. The 45 degree angle design and assembly method make this series of products one of the first manufacturers to achieve true chevron click install.

# STRATO CHEVRON

VINYL FLOORING EXPERT

Strato Chevron SPC is the future star of the Nature series. The 45 degree Angle design and assembly method make this series of products one of the first manufacturers to achieve true chevron click install.

Painted V groove is more detailed to perfect the four sides of the floor, so that the floor is more close to nature and has a three-dimensional design.

The hardened back layer makes your daily work and life more comfortable and quiet.

## FEATURES BENEFITS



Overall  
Thickness



Valinge Click  
2G-5Gi



Anti Slip-R9



Waterproof



Wear Layer



Suitable for  
babies



V-groove painted



EIR



POPULAR COLORS  
RIGID CORE SPC FLOORING

CHEVRON

NATURE  
BY STRATO

## PARAMETERS

**Wear layer**  
0.5mm

**Lock system**  
Valinge 2G-5Gi

**Overall thickness**  
7.0mm (6.0+1.0mmIXPE)

**Density of IXPE**  
130kg/m<sup>3</sup>

**Size**  
127×600mm

**Angle**  
45° (Angle can be adjusted  
from 45°-60°)

**Embossing**  
EIR Embossing

**Bevel**  
V-groove painted

600mm

127mm

45°

TY-5405

## CHEVRON AVAILABLE DECORS

RIGID CORE FLOORING



TY-5401



TY-5401



TY-5402



TY-5403

## CHEVRON AVAILABLE DECORS

RIGID CORE FLOORING



TY-5406



TY-5406



TY-5405



TY-5404

# **NATURE RIGID CORE** SPC FLOORING

# **STONE**



## **STONE**

Stone SPC flooring provides users who like marble and tile with one more choice, comfortable foot feel and non-slip coefficient enrich the customer experience.

# STRATO STONE

VINYL FLOORING EXPERT

Stone SPC flooring provides users who like marble and tile with one more choice, comfortable foot feel and non-slip coefficient enrich the customer experience.

Strato offers five different floor specification to make the installation more atmospheric and close to nature, meet the design ideas of different interior styles.

The large stone pattern sets the tone of the interior design and greatly improves the texture of the overall space.

## FEATURES BENEFITS



Overall Thickness



Valinge Click



Anti Slip-R9



Waterproof



Wear Layer



Suitable for babies



Bevelled Edge



Underlayment for acoustic isolation



**POPULAR COLORS**  
RIGID CORE SPC FLOORING

STONE

NATURE  
BY STRATO

## PARAMETERS 1

<b>Wear layer</b>	<b>Lock system</b>	<b>Overall thickness</b>	<b>Size</b>
0.3mm	Valinge 2G-2G	6mm (5.0+1.0mm XPE)	303×606mm

## STONE AVAILABLE DECORS

RIGID CORE FLOORING



TS-6502



TS-6501

TS-6502

## PARAMETERS 2

**Wear layer**

0.3mm

**Lock system**

Valinge 2G-2G

**Overall thickness**

6.5mm (5.5+1.0mmIXPE)

**Size**

475×900mm

400×800mm

600×900mm

600×1200mm

## STONE AVAILABLE DECORS

### RIGID CORE FLOORING





TS-6503



TS-6504

FOR MORE PRODUCT  
SPECIFICATIONS  
PLEASE CONSULT THE SALES

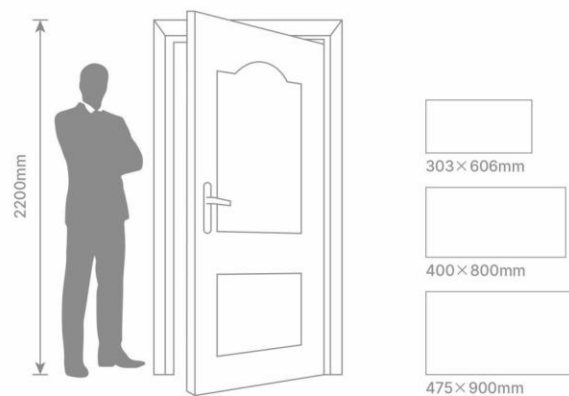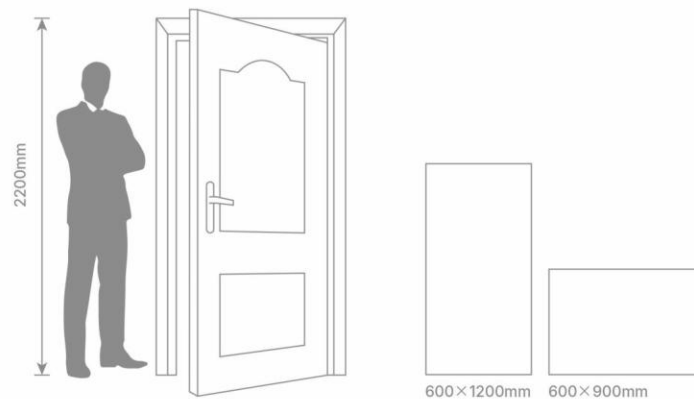

# **NATURE RIGID CORE**

## SPC FLOORING

---

# OEM



## OEM


We have many years of experience in product research and development, with a complete production chain, which help us to provide you with a full range of personalized customized services, that make your products different in the market.

VINYL FLOORING EXPERT

## IF THE ABOVE PRODUCTS DO NOT MEET YOUR NEEDS WE ALSO PROVIDE CUSTOMIZED SERVICES

We have many years of experience in product research and development, with a complete production chain, which help us to provide you with a full range of personalized customized services, that make your products different in the market.

Besides, Trioflor provides you with a full range of personalized customized service on specification and pattern, always keep your products unique stand out in the market.

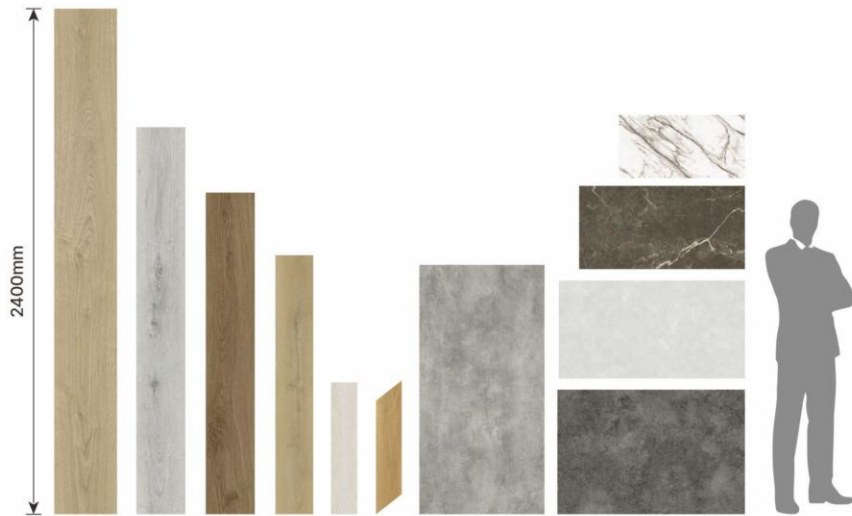

**NATURE  
BY STRATO**

## WHAT CAN WE CUSTOMIZE?



Embossing



Size



Thickness



Design



Angle  
customization



Underlayment for  
acoustic isolation

# NATURE RIGID CORE SPC FLOORING

# TECHNICAL



## TECHNICAL

PROUDCT INFORMATON | REFERENCE | NORMS | RESULT

VINYL FLOORING EXPERT



## STRATO TECHNICAL

PRODUCT INFORMATION		
Material	100% virgin PVC+Calcium calcite powder Plank Size(mm)	
Plank Size(mm)	183x1220mm/230x1500mm/231x1524mm/231x1800mm/228x2400mm 235x625mm/127x635mm 303x606mm/400x800mm/475x900mm/600x900mm/600x1200mm	
Finish	UV Coating	
Emboss	Wood embossing/ EIR embossing	
Installation	Click system	
Locking System	Valinge 2G-2G/ Valinge 2G-5G/ Valinge 2G-5Gi	
Bevel	Four-side bevel/V-groove painted	
Floor heating installation	suitable for underfloor water heating	
REFERENCE	NORMS	RESULT
Tolerance of Length	EN ISO 24342	Avg±0.2mm, Max≤0.5mm
Tolerance of Width	EN ISO 24342	Avg±0.1mm, Max≤0.2mm
Tolerance on the squareness	EN ISO 24342	side length≤400mm, squareness≤0.25mm side length>400mm, squareness≤0.35mm
Thickness	EN ISO 24346	3.2-8mm (+/-0.1mm)
Wear Layer Thickness	EN ISO 24340	0.1-0.7mm (+/-0.05mm)
Determination of stability	EN ISO 23999	≤0.15%
Curling resultant to heat	EN ISO 23999	≤1mm
Color fastness	EN ISO 105-B02	6 class
Reaction to Fire	EN 13501-1	Bf1-S1
Castor Chair Resistance	EN 425	Pass
Peeling strength of layer	EN 431	>=95N/5cm
Locking strength	SO 24334	Long-side: >=150N/5cm Short-side: >=150N/5cm
Stain Resistance	EN 423	Not affected
VOC	ISO 16000	VOC A+
Slip Resistance	DIN 51130	Class R9
Residual Indentation	ISO24343-1:2007	≤0.1mm
Chemical Products Resistance	EN 423	Pass
Ortho-Phthalates	US EPA 3550c:2007	None
PCP	EN 12673	None
Formaldehyde Emission	EN 717-1	E1